



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Petrol engines

Technical specifications	1.5 TSI/110 kW ACT	1.5 TSI/110 kW ACT (A)	1.5 TSI/110 kW 4x4 ACT (A)	2.0 TSI/140 kW 4x4 (A)
Engine				
Engine type	turbocharged petrol engine, in-line, liquid cooling system, DOHC, transverse in front			
Cylinders	4			
Displacement [cm ³]	1498			1984
Bore x Stroke [mm x mm]	74.5 x 85.9			82.5 x 92.8
Max. engine performance/revs [kW at rpm]	110/5000–6000			140/4200–6000
Max. torque/revs [Nm at rpm]	250/1500–3500			320/1500–4100
Compression ratio	10.5 : 1			11.65:1
Emission limit	EU 6 AG			EU 6 BG
Fuel injection system	electronically controlled direct injection			electronically controlled combined (direct and port) injection
Ignition	control unit controlled electronic ignition system			
Lubrication	force-feed lubrication with through-flow oil filter			
Fuel quality	unleaded petrol min. RON 95			
Transmission				
Wheel drive	front wheel drive		four-wheel drive with automatic torque distribution	
Clutch	hydraulic single dry clutch disc with membrane spring, asbestos free	two coaxial wet multiple-disk clutch, electro-hydraulically operated		
Transmission	manual 6-speed fully synchronized	automatic 7-speed, DSG, with Tiptronic manual gear changing		
Transmission ratio	I-3.769 II-2.087 III-1.324 IV-0.977 V-0.975 VI-0.814 R-4.549	I-3.190 II-2.750 III-1.897 IV-1.040 V-0.793 VI-0.860 VII-0.661 R-2.900	I-3.190 II-2.750 III-1.897 IV-1.040 V-0.793 VI-0.860 VII-0.661 R-2.900	I-3.400 II-2.750 III-1.767 IV-0.925 V-0.705 VI-0.755 VII-0.635 R-2.900
Axle ratio	I-4.562 II-3.476	I-5.200 II-3.900	I-5.200 II-3.900	I-4.812 II-3.667



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Petrol engines

Technical specifications		1.5 TSI/110 kW ACT	1.5 TSI/110 kW ACT (A)	1.5 TSI/110 kW 4x4 ACT (A)	2.0 TSI/140 kW 4x4 (A)
Chassis					
Front axle		MacPherson suspension with lower triangular links and torsion stabiliser			
Rear axle		multi-element axle, with one longitudinal and three transverse links, with torsion stabiliser			
Springs		telescopic shock absorbers with coil springs, in the rear outside the springs			
Braking system		hydraulic diagonal dual-circuit braking system, vacuum servo assisted			
Brake – front		disc brakes with inner cooling, with single/piston floating caliper			
Brake – rear		disc brakes			
Parking brake		electromechanical, on rear wheels			
Steering system		direct rack and pinion steering with electro mechanic power steering			
Body					
Body		5 door, two compartment, 5 seater {7 seater}			
Drag coefficient c_w		0.337		0.338	0.335
Outside dimensions					
Length	[mm]	4697			
Width	[mm]	1882			
Height (at kerb weight)	[mm]	1660 {1659}			
Wheel base	[mm]	2791			
Clearance (at kerb weight)	[mm]	193 {192}			191
Track front	[mm]	1586			
Track rear	[mm]	1576			



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Petrol engines

Technical specifications		1.5 TSI/110 kW ACT	1.5 TSI/110 kW ACT (A)	1.5 TSI/110 kW 4x4 ACT (A)	2.0 TSI/140 kW 4x4 (A)
Inside dimensions					
Width of front seats	[mm]	1527			
Width of rear seats (2 nd /3 rd row)	[mm]	1510/- {1511/1270}			
Headroom in front seats	[mm]	1020			
Headroom in rear seats (2 nd /3 rd row)	[mm]	1014/- {1015/905}			
Storage capacity (behind 3 rd row of seats up to headrests, boot cover is stored under the boot floor)	[l]	{270***}			
Storage capacity up to the rear shelf (with 3 rd row of seats folded down, depending on position of backrest, and depending on the position of adjustable 2 nd row of seats)	[l]	650-835*** {560-765***}			
Storage capacity with rear seats folded down, up to the roof	[l]	2065 {2005}			
Weights					
Kerb weight – incl. driver**	[kg]	1549 {1592}	1582 {1625}	1661 {1704}	1711 {1754}
Payload – incl. driver**	[kg]	700 {709}	700 {710}	700 {756}	700 {751}
Total weight	[kg]	2174 {2226}	2207 {2260}	2286 {2385}	2336 {2430}
Max. roof load	[kg]	75			
Max. trailer load w/o brakes	[kg]	750			
Max. trailer load with brakes – 12%	[kg]	1800		2000	2200 {2000}
Max. trailer load with brakes – 8%	[kg]	1800		2000	2200 {2000}
Max. nose weight	[kg]	100 {80}			
Liquids					
Tank capacity	[l]	58			60



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Petrol engines

Technical specifications		1.5 TSI/110 kW ACT	1.5 TSI/110 kW ACT (A)	1.5 TSI/110 kW 4x4 ACT (A)	2.0 TSI/140 kW 4x4 (A)
Performance/consumption					
Maximum speed	[km/h]	200	198	195	211 {210}
Acceleration 0–100 km/h	[s]	9,8 {9,9}	9,8 {9,9}	9,9 {10,0}	7,5 {7,7}
Fuel consumption (NEDC)					
– urban	[l/100 km]	7.5	6.9 {7.1}	7.7	8.6 {8.7}
– extra-urban	[l/100 km]	5.6	5.4 {5.5}	5.9	5.8 {5.9}
– combined	[l/100 km]	6.3	6.0 {6.1}	6.6	6.8 {6.9}
CO ₂ emissions	[g/km]	143	136 {139}	150	154 {158}
Turning circle diameter	[m]	11.6			

The technical data is valid for the basic version.

** Figures apply to basic version, weight of driver 75 kg.

*** The capacity depends on the position of the backrests and rear seats.

{ } Applies to 7-seater.

The specified fuel consumption and emission data have been determined according to the measurement procedures prescribed by law. Since 1st September 2017, certain new vehicles are already being type-approved according to the Worldwide Harmonized Light Vehicles Test Procedure (WLTP), a more realistic test procedure for measuring fuel consumption and CO₂ emissions. Starting on September 1st 2018, the New European Driving Cycle (NEDC) will be replaced by the WLTP in stages. Owing to the more realistic test conditions, the fuel consumption and CO₂ emissions measured according to the WLTP will, in many cases, be higher than those measured according to the NEDC.


We are currently still required by law to state the NEDC figures. In the case of new vehicles which have been type-approved according to the WLTP, the NEDC figures are derived from the WLTP data. It is possible to specify the WLTP figures voluntarily in addition until such time as this is required by law. In cases where the NEDC figures are specified as value ranges, these do not refer to a particular individual vehicle and do not constitute part of the sales offering. They are intended exclusively as a means of comparison between different vehicle types. Additional equipment and accessories (e.g. add-on parts, different tyre formats, etc.) may change the relevant vehicle parameters, such as weight, rolling resistance and aerodynamics, and, in conjunction with weather and traffic conditions and individual driving style, may affect fuel consumption, electrical power consumption, CO₂ emissions and the performance figures for the vehicle.

ŠKODA KODIAQ

Petrol engines



ŠKODA
SIMPLY CLEVER

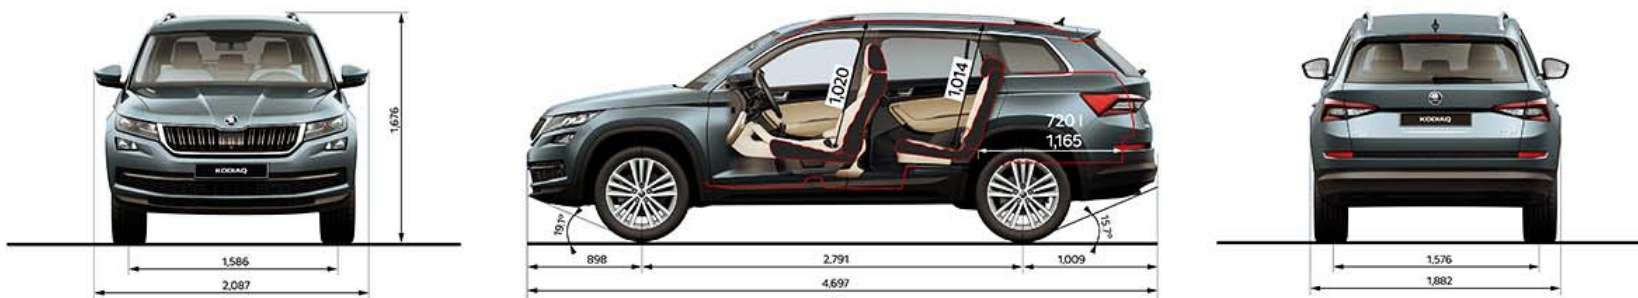



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Diesel engines

Technical specifications	2.0 TDI/85 kW	2.0 TDI/110 kW (A)	2.0 TDI/110 kW 4x4	2.0 TDI/110 kW 4x4 (A)	2.0 TDI/140 kW 4x4 (A)
Engine					
Engine type	turbocharged diesel engine, turbocharger with self-aligning blades, in-line, liquid cooling system, DOHC, transverse in front				
Cylinders	4				
Displacement [cm ³]	1968				
Bore x Stroke [mm x mm]	81.0 x 95.5				
Max. engine performance/revs [kW at rpm]	85/2750–4500	110/3500–4000		140/3500–4000	
Max. torque/revs [Nm at rpm]	320/1700–2500	340/1750–3000		400/1750–3250	
Compression ratio	16.0 : 1	16.2 : 1		15.5 : 1	
Emission limit	EU 6 BG	EU 6 AG			
Fuel injection system	electronically controlled high-pressure direct injection – common-rail system				
Lubrication	force-feed lubrication with through-flow oil filter				
Fuel quality	diesel				
Transmission					
Wheel drive	front wheel drive		four-wheel drive with automatic torque distribution		
Clutch	hydraulic single dry clutch disc with membrane spring, asbestos free	two coaxial wet multiple-disk clutch, electro-hydraulically operated	hydraulic single dry clutch disc with membrane spring, asbestos free	two coaxial wet multiple-disk clutch, electro-hydraulically operated	
Transmission	manual 6-speed fully synchronized	automatic 7-speed, DSG, with Tiptronic manual gear changing	manual 6-speed fully synchronized	automatic 7-speed, DSG, with Tiptronic manual gear changing	
Transmission ratio	I-3.769 II-1.958 III-1.324 IV-0.911 V-0.902 VI-0.756 R-4.549	I-3.579 II-2.750 III-1.677 IV-0.889 V-0.677 VI-0.722 VII-0.561 R-2.900	I-3.769 II-2.087 III-1.324 IV-0.977 V-0.975 VI-0.814 R-4.549	I-3.579 II-2.750 III-1.677 IV-0.889 V-0.677 VI-0.722 VII-0.561 R-2.900	I-3.562 II-2.526 III-1.586 IV-0.938 V-0.722 VI-0.688 VII-0.574 R-2.789
Axle ratio	I-3.944 II-3.087	I-4.812 II-3.677	I-3.944 II-3.087	I-4.812 II-3.677	I-4.733 II-3.944



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Diesel engines

Technical specifications	2.0 TDI/85 kW	2.0 TDI/110 kW (A)	2.0 TDI/110 kW 4x4	2.0 TDI/110 kW 4x4 (A)	2.0 TDI/140 kW 4x4 (A)
Chassis					
Front axle	MacPherson suspension with lower triangular links and torsion stabiliser				
Rear axle	multi-element axle, with one longitudinal and three transverse links, with torsion stabiliser				
Springs	telescopic shock absorbers with coil springs, in the rear outside the springs				
Braking system	hydraulic diagonal dual-circuit braking system, vacuum servo assisted				
Brake – front	disc brakes with inner cooling, with single/piston floating caliper				
Brake – rear	disc brakes				
Parking brake	electromechanical, on rear wheels				
Steering system	direct rack and pinion steering with electro mechanic power steering				
Body					
Body	5 door, two compartment, 5 seater {7 seater}				
Drag coefficient c_w	0.331 {0.335}		0.332 {0.336}		
Outside dimensions					
Length [mm]	4697				
Width [mm]	1882				
Height (at kerb weight) [mm]	1660 {1659}				
Wheel base [mm]	2791				
Clearance (at kerb weight) [mm]	193 {192}		191		
Track front [mm]	1586				
Track rear [mm]	1576				



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Diesel engines

Technical specifications		2.0 TDI/85 kW	2.0 TDI/110 kW (A)	2.0 TDI/110 kW 4x4	2.0 TDI/110 kW 4x4 (A)	2.0 TDI/140 kW 4x4 (A)
Inside dimensions						
Width of front seats	[mm]			1527		
Width of rear seats (2 nd /3 rd row)	[mm]			1510/- {1511/1270}		
Headroom in front seats	[mm]			1020		
Headroom in rear seats (2 nd /3 rd row)	[mm]			1014/- {1015/905}		
Storage capacity (behind 3 rd row of seats up to headrests, boot cover is stored under the boot floor)	[l]			{270***}		
Storage capacity up to the rear shelf (with 3 rd row of seats folded down, depending on position of backrest, and depending on the position of adjustable 2 nd row of seats)	[l]			650-835*** {560-765***}		
Storage capacity with rear seats folded down, up to the roof	[l]			2065 {2005}		
Weights						
Kerb weight – incl. driver**	[kg]	1651 {1694}	1686 {1729}	1725 {1768}	1762 {1805}	1775 {1818}
Payload – incl. driver**	[kg]	700 {746}	700 {731}	700 {738}	700 {720}	700 {725}
Total weight	[kg]	2276 {2365}	2311 {2385}	2350 {2431}	2387 {2450}	2400 {2468}
Max. roof load	[kg]			75		
Max. trailer load w/o brakes	[kg]	750 {-}	750 {-}	750 {-}		750
Max. trailer load with brakes – 12%	[kg]	1800 {-}	2000	1950 {-}		2500 {2000}
Max. trailer load with brakes – 8%	[kg]	1800 {-}	2000	1950 {-}		2500 {2000}
Max. nose weight	[kg]	100 {-}	100 {80}	100 {-}		100 {80}
Liquids						
Tank capacity	[l]		58		60	



ŠKODA
SIMPLY CLEVER

ŠKODA KODIAQ

Diesel engines

Technical specifications		2.0 TDI/85 kW	2.0 TDI/110 kW (A)	2.0 TDI/110 kW 4x4	2.0 TDI/110 kW 4x4 (A)	2.0 TDI/140 kW 4x4 (A)
Performance/consumption						
Maximum speed	[km/h]	184 {183}	198	197 {196}	194 {193}	210 {209}
Acceleration 0–100 km/h	[s]	11.6 {11.9}	9.8 {10.0}	9.7 {9.9}	9.8 {10.0}	8.4 {8.6}
Fuel consumption (NEDC)						
– urban	[l/100 km]	5.6	5.4	6.5	6.2	6.6
– extra-urban	[l/100 km]	4.3	4.6	4.9	5.0	5.1
– combined	[l/100 km]	4.8	4.9	5.4	5.4	5.7
CO ₂ emissions	[g/km]	126	129	145	143	149
Turning circle diameter	[m]	11.6				

The technical data is valid for the basic version.

** Figures apply to basic version, weight of driver 75 kg.

*** The capacity depends on the position of the backrests and rear seats.

{ } Applies to 7-seater.

The specified fuel consumption and emission data have been determined according to the measurement procedures prescribed by law. Since 1st September 2017, certain new vehicles are already being type-approved according to the Worldwide Harmonized Light Vehicles Test Procedure (WLTP), a more realistic test procedure for measuring fuel consumption and CO₂ emissions. Starting on September 1st 2018, the New European Driving Cycle (NEDC) will be replaced by the WLTP in stages. Owing to the more realistic test conditions, the fuel consumption and CO₂ emissions measured according to the WLTP will, in many cases, be higher than those measured according to the NEDC.

We are currently still required by law to state the NEDC figures. In the case of new vehicles which have been type-approved according to the WLTP, the NEDC figures are derived from the WLTP data. It is possible to specify the WLTP figures voluntarily in addition until such time as this is required by law. In cases where the NEDC figures are specified as value ranges, these do not refer to a particular individual vehicle and do not constitute part of the sales offering. They are intended exclusively as a means of comparison between different vehicle types. Additional equipment and accessories (e.g. add-on parts, different tyre formats, etc.) may change the relevant vehicle parameters, such as weight, rolling resistance and aerodynamics, and, in conjunction with weather and traffic conditions and individual driving style, may affect fuel consumption, electrical power consumption, CO₂ emissions and the performance figures for the vehicle.

ŠKODA KODIAQ

Diesel engines



ŠKODA
SIMPLY CLEVER

