KamiqPetrol engines



Technical specifications	1.0 TSI/70 kW	1.0 TSI/85 kW	1.0 TSI/85 kW (A)	1.5 TSI/110 kW	1.5 TSI/110 kW (A)	
Engine						
Engine type	turbocharged petrol engine, in-line, liquid cooling system, DOHC, transverse in front					
Cylinders	3			4		
Displacement [cm³]		999		1498		
Bore × Stroke [mm × mm]	74.5 × 76.4			74.5 × 85.9		
Max. engine performance/revs [kW at rpm]	70/5000–5500 85/5500 110/5000–60		00–6000			
Max. torque/revs [Nm at rpm]	175/1600–3500	175/1600–3500 200/2000–3500 250/1500–		00–3500		
Compression ratio	11.5 : 1			0:1		
Emission limit	EU 6 EA					
Fuel injection system	electronically controlled direct injection					
Ignition	control unit controlled electronic ignition system					
Lubrication	force-feed lubrication with through-flow oil filter					
Fuel quality	unleaded petrol min. RON 95					
Transmission						
Wheel drive	front wheel drive					
Clutch	hydraulic single dry clutch disc with membrane spring, asbestos free two coaxial dry multiple-disk clutch, electro-hydraulically operated			hydraulic single dry clutch disc with membrane spring, asbestos free	two coaxial dry multiple- disk clutch, electro- hydraulically operated	
Transmission	manual 5-speed fully synchronized	manual 6-speed fully synchronized	automatic 7-speed, DSG, with Tiptronic manual gear changing	manual 6-speed fully synchronized	automatic 7-speed, DSG, with Tiptronic manual gear changing	
Transmission ratio	I-3.769 II-2.095 III-1.281 IV-0.881 V-0.673 R-3.182	I-3.615 II-2.111 III-1.387 IV-0.973 V-0.739 VI-0.554 R-3.182	I-3.765 II-2.273 III-1.531 IV-1.133 V-1.176 VI-0.956 VII-0.795 R-4.170	I-3.750 II-2.100 III-1.357 IV-1.026 V-0.810 VI-0.652 R-3.583	I-3.500 II-2.087 III-1.343 IV-0.940 V-0.974 VI-0.780 VII-0.653 R-3.722	
Axle ratio	4.357	4.688	I-4.800 II-3.429 III-4.500	3.684	I-4.800 II-3.429 III-4.500	
Chassis						
Front axle	MacPherson suspension with lower triangular links and torsion stabiliser					
Rear axle	compound link crank-axle					
Springs	telescopic shock absorbers with coil springs, in the rear outside the springs					
Braking system	hydraulic diagonal dual-circuit braking system, vacuum servo assisted					
Brake – front	disc brakes with inner cooling, with single/piston floating caliper					
Brake – rear	drum brakes disc brakes					
Parking brake	manual, on rear wheels					
Steering system	direct rack and pinion steering with electro mechanic power steering					

1/4 9. 1. 2024

Kamiq

Petrol engines



Technical specifications		1.0 TSI/70 kW	1.0 TSI/85 kW	1.0 TSI/85 kW (A)	1.5 TSI/110 kW	1.5 TSI/110 kW (A)	
Body							
Body		5 door, two compartment, 5 seater					
Drag coefficient cw		0.312–0.335					
Outside dimensions							
Length	[mm]	4241					
Width	[mm]	1793					
Height (at kerb weight)	[mm]	1531					
Wheel base	[mm]	2651					
Clearance (at kerb weight)	[mm]	188					
Height of the loading sill (at kerb weight)	[mm]	696					
Track front	[mm]	1531					
Track rear	[mm]	1516					
Inside dimensions							
Width of front seats	[mm]	1439					
Width of rear seats	[mm]	1425					
Headroom in front seats	[mm]	1051					
Headroom in rear seats	[mm]	1003					
Storage capacity	[1]	400					
Storage capacity with rear seatback folded down	[1]	1395					
Weights							
Kerb weight – incl. driver 75 kg	[kg]	1223–1381	1233–1396	1254–1417	1276–1431	1288–1443	
Payload – incl. driver 75 kg	[kg]	414–538	429–552	428–551	434–550	432–548	
Total weight	[kg]	1674–1720	1696–1750	1716–1770	1737–1790	1747–1800	
Max. roof load	[kg]	75					
Max. trailer load w/o brakes	[kg]	610		620	630	640	
Max. trailer load with brakes – 12%	[kg]	1000	1200		1250		
Max. trailer load with brakes – 8%	[kg]	1000	1200		1250		
Max. nose weight	[kg]	75					
Liquids							
Tank capacity	[1]	50					

2/4 9. 1. 2024

Kamiq

Petrol engines



Technical specifications		1.0 TSI/70 kW	1.0 TSI/85 kW	1.0 TSI/85 kW (A)	1.5 TSI/110 kW	1.5 TSI/110 kW (A)
Performance/consumption						
Maximum speed	[km/h]	183	196	195	214	213
Acceleration 0–100 km/h	[s]	11.0	9.7	10.2	8.3	8.3
Fuel consumption – combined (WLTP)	[l/100 km]	5.4-5.8	5.4–5.8	5.6-6.0	5.7-6.1	5.7–6.1
CO ₂ emissions – combined (WLTP)	[g/km]	123–132	122–131	126–135	128–137	128–137
Turning circle diameter	[m]	10.1				

Technical specifications and drawings apply to the Essence a Selection versions. The parameters and engine offered for Monte Carlo cars may differ.


3/4 9. 1. 2024

Kamiq

Petrol engines





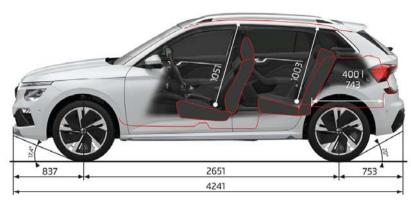



4/4 9. 1. 2024