

Technical specifications	Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq 85x RS
Engine				
Engine type	permanent magnet synchronous motor		rear – permanent magnet synchronous motor / front – asynchronous motor	
Max. system engine performance [kW]	132*	210**	210**	250**
Max. torque [Nm]	310	545	545	545
Battery capacity brutto (netto) [kWh]	62 (58)	82 (77)		
Battery type	Li-Ion (DC-high-voltage)			
Transmission				
Wheel drive	rear wheel drive		four-wheel drive	
Transmission	single-speed		two single-speed	
Axle ratio	4.389	3.895	rear – 3.895 / front – 3.783	
Chassis				
Front axle	MacPherson suspension with lower triangular links and torsion stabiliser			
Rear axle	multi-element axle, with five transverse links and torsion stabiliser			
Springs	telescopic shock absorbers with coil springs, in the rear outside the springs			
Braking system	hydraulic diagonal dual-circuit braking system, electromechanical servo assisted			
Brake – front	disc brakes with inner cooling, with single-piston floating caliper	disc brakes with inner cooling, with two-piston floating caliper		
Brake – rear	drum brakes			
Parking brake	electromechanical, on rear wheels			
Steering system	direct rack and pinion steering with electro mechanic power steering			electromechanical power steering with variable ratio
Body				
Body	5 door, two compartment, 5 seater			
Drag coefficient c _w	0.255–0.277	0.258–0.280		0.265–0.277

Technical specifications		Enyaq 60		Enyaq 85		Enyaq 85x		Enyaq 85x RS	
Outside dimensions									
Length	[mm]	4649						4653	
Width	[mm]	1879							
Height (at kerb weight)	[mm]	1621				1620		1605	
Wheel base	[mm]	2765						2768	
Clearance (at kerb weight)	[mm]	188				187		173	
Height of the loading sill (at kerb weight)	[mm]	705		704				688	
Track front	[mm]	1587						1589	
Track rear	[mm]	1565						1573	
Inside dimensions									
Width of front seats	[mm]	1506							
Width of rear seats	[mm]	1488							
Headroom in front seats	[mm]	1056							
Headroom in rear seats	[mm]	990							
Storage capacity	[l]	585							
Storage capacity – with rear seatback folded down	[l]	1710							
Weights									
Kerb weight – incl. driver 75 kg	[kg]	1992–2168		2137–2311		2222–2396		2251–2389	
Payload – incl. driver 75 kg	[kg]	411–587		414–588		429–603		436–574	
Total weight	[kg]	2504		2650		2750		2750	
Max. roof load	[kg]	75							
Max. trailer load w/o brakes	[kg]	750							
Max. trailer load with brakes – 12%	[kg]	1000				1200			
Max. trailer load with brakes – 8%	[kg]	1200				1400			
Max. nose weight	[kg]	75							

Technical specifications	Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq 85x RS
Performance/consumption				
Maximum speed [km/h]	160	180		
Acceleration 0–100 km/h [s]	8.7	6.7	6.6	5.5
Fuel consumption – combined (WLTP) [kWh/100 km]	16.0–17.0	14.8–15.9	15.9–16.9	15.9–16.7
CO ₂ emissions [g/km]	0			
Range (WLTP) [km]	401	566	539	542
AC charging (0–100 %) – power/time (according to the type of cable)	11 kW/6 h 15 min	11 kW/7 h 30 min	11 kW/7 h 30 min	11 kW/7 h 30 min
DC charging (10–80 %) – power/time	120 kW/35 min	135 kW/28 min	175 kW/28 min	175 kW/28 min
Turning circle diameter [m]	9.3		10.8	

Technical specifications do not apply for Sportline cars. Specifications may also differ depending on the battery version and chassis configuration.


* The availability of the maximum electrical output could be limited. The amount of power available in individual driving situations depends on various factors, such as ambient temperature and the charge status, temperature, and condition or physical age of the high-voltage battery.

** Maximum electrical output of 210 kW/250 kW: Maximum output that can be accessed for a maximum of 30 seconds, calculated in accordance with UN GTR No. 21. The amount of power available in individual driving situations depends on various factors, such as ambient temperature and the charge status, temperature, and condition or physical age of the high-voltage battery. The availability of the maximum power requires the high-voltage battery to be between 23°C and 50°C and have a charge level of > 88%. Deviations from the aforementioned parameters in particular may lead to a reduction in power, through to the complete unavailability of the maximum power.

The battery temperature can be indirectly influenced by the auxiliary air conditioner to a certain extent and the charge level can, for example, be adjusted in the vehicle. The amount of power available at a particular time is shown in the vehicle's power display. To maintain the high-voltage battery's usable capacity as effectively as possible, a battery charging target of 80% is recommended if the vehicle is used daily (to be switched to 100% prior to long-distance journeys, for example).

Enyaq

SKODA

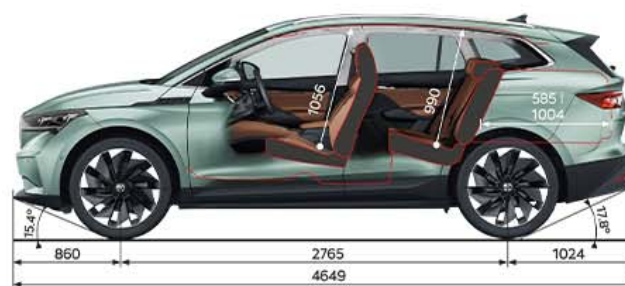

Enyaq Coupé



Technical specifications	Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq 85x RS
Engine				
Engine type	permanent magnet synchronous motor		rear – permanent magnet synchronous motor / front – asynchronous motor	
Max. system engine performance [kW]	132*	210**	210**	250**
Max. torque [Nm]	310	545	545	545
Battery capacity brutto (netto) [kWh]	62 (58)	82 (77)		
Battery type	Li-Ion (DC-high-voltage)			
Transmission				
Wheel drive	rear wheel drive		four-wheel drive	
Transmission	single-speed		two single-speed	
Axle ratio	4.389	3.895	rear – 3.895 / front – 3.783	
Chassis				
Front axle	MacPherson suspension with lower triangular links and torsion stabiliser			
Rear axle	multi-element axle, with five transverse links and torsion stabiliser			
Springs	telescopic shock absorbers with coil springs, in the rear outside the springs			
Braking system	hydraulic diagonal dual-circuit braking system, electromechanical servo assisted			
Brake – front	disc brakes with inner cooling, with single-piston floating caliper	disc brakes with inner cooling, with two-piston floating caliper		
Brake – rear	drum brakes			
Parking brake	electromechanical, on rear wheels			
Steering system	direct rack and pinion steering with electro mechanic power steering			electromechanical power steering with variable ratio
Body				
Body	5 door, two compartment, 5 seater			
Drag coefficient c _w	0.234–0.263	0.240–0.271		0.248–0.272

Enyaq Coupé



Technical specifications		Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq 85x RS
Outside dimensions					
Length	[mm]	4653			
Width	[mm]	1879			
Height (at kerb weight)	[mm]	1621			1608
Wheel base	[mm]	2765			2768
Clearance (at kerb weight)	[mm]	193			181
Height of the loading sill (at kerb weight)	[mm]	793			779
Track front	[mm]	1587			1589
Track rear	[mm]	1565			1573
Inside dimensions					
Width of front seats	[mm]	1506			
Width of rear seats	[mm]	1488			
Headroom in front seats	[mm]	1095			
Headroom in rear seats	[mm]	990			
Storage capacity	[l]	570			
Storage capacity – with rear seatback folded down	[l]	1610			
Weights					
Kerb weight – incl. driver 75 kg	[kg]	2000–2147	2145–2290	2230–2375	2258–2369
Payload – incl. driver 75 kg	[kg]	438–585	435–580	450–595	456–567
Total weight	[kg]	2510	2650	2750	2750
Max. roof load	[kg]	75			
Max. trailer load w/o brakes	[kg]	750			
Max. trailer load with brakes – 12%	[kg]	1000	1200		
Max. trailer load with brakes – 8%	[kg]	1200	1400		
Max. nose weight	[kg]	75			

Enyaq Coupé



Technical specifications	Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq 85x RS
Performance/consumption				
Maximum speed [km/h]	160	180		
Acceleration 0–100 km/h [s]	8.7	6.7	6.6	5.5
Fuel consumption – combined (WLTP) [kWh/100 km]	15.6–16.7	14.5–15.5	15.6–16.5	15.7–16.3
CO ₂ emissions [g/km]	0			
Range (WLTP) [km]	410	577	548	548
AC charging (0–100 %) – power/time (according to the type of cable)	11 kW/6 h 15 min	11 kW/7 h 30 min	11 kW/7 h 30 min	11 kW/7 h 30 min
DC charging (10–80 %) – power/time	120 kW/35 min	135 kW/28 min	175 kW/28 min	175 kW/28 min
Turning circle diameter [m]	9.3		10.8	

Technical specifications do not apply for Sportline cars. Specifications may also differ depending on the battery version and chassis configuration.

* The availability of the maximum electrical output could be limited. The amount of power available in individual driving situations depends on various factors, such as ambient temperature and the charge status, temperature, and condition or physical age of the high-voltage battery.

** Maximum electrical output of 210 kW/250 kW: Maximum output that can be accessed for a maximum of 30 seconds, calculated in accordance with UN GTR No. 21. The amount of power available in individual driving situations depends on various factors, such as ambient temperature and the charge status, temperature, and condition or physical age of the high-voltage battery. The availability of the maximum power requires the high-voltage battery to be between 23°C and 50°C and have a charge level of > 88%. Deviations from the aforementioned parameters in particular may lead to a reduction in power, through to the complete unavailability of the maximum power.

The battery temperature can be indirectly influenced by the auxiliary air conditioner to a certain extent and the charge level can, for example, be adjusted in the vehicle. The amount of power available at a particular time is shown in the vehicle's power display. To maintain the high-voltage battery's usable capacity as effectively as possible, a battery charging target of 80% is recommended if the vehicle is used daily (to be switched to 100% prior to long-distance journeys, for example).

Enyaq Coupé

SKODA

