

Technical specifications	Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq RS
Engine				
Engine type	permanent magnet synchronous motor		rear – permanent magnet synchronous motor / front – asynchronous motor	
Max. system engine performance [kW]	150*	210*	210*	250*
Battery capacity gross (net) [kWh]	63 (59)	82 (77)		84 (79)
Battery type	Li-Ion (DC-high-voltage)			
Transmission				
Wheel drive	rear wheel drive		four-wheel drive	
Transmission	single-speed		two single-speed	
Axle ratio	4.389	3.895	rear – 3.895 / front – 3.783	
Chassis				
Front axle	MacPherson suspension with lower triangular links and torsion stabiliser			
Rear axle	multi-element axle, with five transverse links and torsion stabiliser			
Springs	telescopic shock absorbers with coil springs, in the rear outside the springs			
Braking system	hydraulic diagonal dual-circuit braking system, electromechanical servo assisted			
Brake – front	disc brakes with inner cooling, with single-piston floating caliper	disc brakes with inner cooling, with two-piston floating caliper		
Brake – rear	drum brakes			
Parking brake	electromechanical, on rear wheels			
Steering system	direct rack and pinion steering with electro mechanic power steering			electromechanical power steering with variable ratio
Body				
Body	5 door, two compartment, 5 seater			
Drag coefficient c _d	0.245–0.269	0.246–0.270		0.251–0.266
Outside dimensions				
Length [mm]	4658			4660
Width [mm]	1879			
Height (at kerb weight) [mm]	1622	1620		1607
Wheel base [mm]	2766			2769
Clearance (at kerb weight) [mm]	183	181		167
Height of the loading sill (at kerb weight) [mm]	706	703		690
Track front [mm]	1587			1589
Track rear [mm]	1561			1568



Technical specifications		Enyaq 60		Enyaq 85		Enyaq 85x		Enyaq RS	
Inside dimensions									
Width of front seats	[mm]	1506							
Width of rear seats	[mm]	1488							
Headroom in front seats	[mm]	1056							
Headroom in rear seats	[mm]	990							
Storage capacity	[l]	585							
Storage capacity – with rear seatback folded down	[l]	1710							
Weights									
Kerb weight – incl. driver 75 kg	[kg]	2002–2160		2141–2304		2230–2384		2236–2377	
Payload – incl. driver 75 kg	[kg]	419–577		421–584		441–595		448–589	
Total weight	[kg]	2504		2650		2750		2750	
Max. roof load	[kg]	75							
Max. trailer load w/o brakes	[kg]	750							
Max. trailer load with brakes – 12%	[kg]	1000				1200			
Max. trailer load with brakes – 8%	[kg]	1200				1400			
Max. nose weight	[kg]	75							
Performance/consumption									
Maximum speed	[km/h]	160		180					
Acceleration 0–100 km/h	[s]	8.1		6.7		6.7		5.4	
Fuel consumption – combined (WLTP)	[kWh/100 km]	15.5		14.9		15.7		15.8	
CO ₂ emissions	[g/km]	0							
Range (WLTP)	[km]	434		581		544		562	
AC charging (0–100 %) – power/time (according to the type of cable)		11 kW/6 h 30 min		11 kW/8 h 00 min		11 kW/8 h 00 min		11 kW/8 h 30 min	
DC charging (10–80 %) – power/time		165 kW/24 min		135 kW/28 min		175 kW/28 min		185 kW/26 min	
Turning circle diameter	[m]	9.3				10.8			

Technical specifications do not apply for Sportline cars. Specifications may also differ depending on the battery version and chassis configuration.

* The maximum power is determined in accordance with UN-GTR.21. The maximum power is available when the high-voltage battery is at its highest possible state of charge (SoC) and operating within its optimal temperature range. The power available varies according to the driving scenario and is influenced by factors including the battery's temperature, its SoC, and the physical ageing of the high-voltage battery.

Škoda Enyaq

SKODA

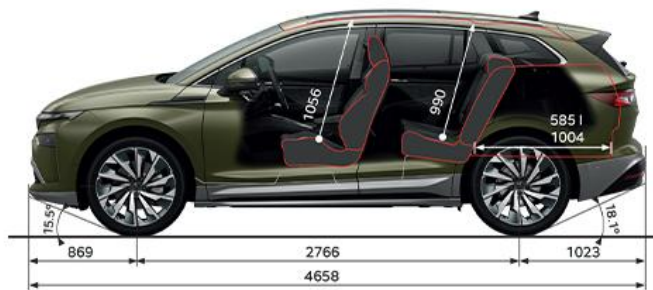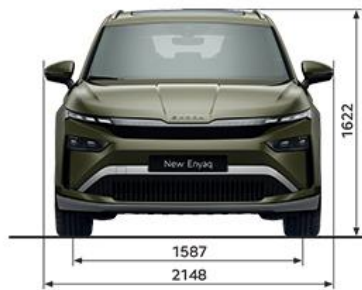

Škoda Enyaq Coupé



Technical specifications	Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq RS
Engine				
Engine type	permanent magnet synchronous motor		rear – permanent magnet synchronous motor / front – asynchronous motor	
Max. system engine performance [kW]	150*	210*	210*	250*
Battery capacity gross (net) [kWh]	63 (59)	82 (77)		84 (79)
Battery type	Li-Ion (DC-high-voltage)			
Transmission				
Wheel drive	rear wheel drive		four-wheel drive	
Transmission	single-speed		two single-speed	
Axle ratio	4.389	3.895	rear – 3.895 / front – 3.783	
Chassis				
Front axle	MacPherson suspension with lower triangular links and torsion stabiliser			
Rear axle	multi-element axle, with five transverse links and torsion stabiliser			
Springs	telescopic shock absorbers with coil springs, in the rear outside the springs			
Braking system	hydraulic diagonal dual-circuit braking system, electromechanical servo assisted			
Brake – front	disc brakes with inner cooling, with single-piston floating caliper	disc brakes with inner cooling, with two-piston floating caliper		
Brake – rear	drum brakes			
Parking brake	electromechanical, on rear wheels			
Steering system	direct rack and pinion steering with electro mechanic power steering			electromechanical power steering with variable ratio
Body				
Body	5 door, two compartment, 5 seater			
Drag coefficient c _d	0.225–0.254	0.229–0.256		0.239–0.253
Outside dimensions				
Length [mm]	4658			4660
Width [mm]	1879			
Height (at kerb weight) [mm]	1623	1621		1608
Wheel base [mm]	2766			2769
Clearance (at kerb weight) [mm]	183	181		167
Height of the loading sill (at kerb weight) [mm]	795	792		779
Track front [mm]	1587			1589
Track rear [mm]	1561			1568

Škoda Enyaq Coupé



Technical specifications		Enyaq 60	Enyaq 85	Enyaq 85x	Enyaq RS
Inside dimensions					
Width of front seats	[mm]	1506			
Width of rear seats	[mm]	1488			
Headroom in front seats	[mm]	1095			
Headroom in rear seats	[mm]	990			
Storage capacity	[l]	570			
Storage capacity – with rear seatback folded down	[l]	1610			
Weights					
Kerb weight – incl. driver 75 kg	[kg]	2006–2138	2145–2276	2234–2362	2239–2354
Payload – incl. driver 75 kg	[kg]	441–573	449–580	463–591	471–586
Total weight	[kg]	2504	2650	2750	2750
Max. roof load	[kg]	75			
Max. trailer load w/o brakes	[kg]	750			
Max. trailer load with brakes – 12%	[kg]	1000	1200		
Max. trailer load with brakes – 8%	[kg]	1200	1400		
Max. nose weight	[kg]	75			
Performance/consumption					
Maximum speed	[km/h]	160	180		
Acceleration 0–100 km/h	[s]	8.1	6.7	6.7	5.4
Fuel consumption – combined (WLTP)	[kWh/100 km]	15.1	14.7	15.4	15.6
CO ₂ emissions	[g/km]	0			
Range (WLTP)	[km]	443	591	552	568
AC charging (0–100 %) – power/time (according to the type of cable)		11 kW/6 h 30 min	11 kW/8 h 00 min	11 kW/8 h 00 min	11 kW/8 h 30 min
DC charging (10–80 %) – power/time		165 kW/24 min	135 kW/28 min	175 kW/28 min	185 kW/26 min
Turning circle diameter	[m]	9.3		10.8	

Technical specifications do not apply for Sportline cars. Specifications may also differ depending on the battery version and chassis configuration.

* The maximum power is determined in accordance with UN-GTR.21. The maximum power is available when the high-voltage battery is at its highest possible state of charge (SoC) and operating within its optimal temperature range. The power available varies according to the driving scenario and is influenced by factors including the battery's temperature, its SoC, and the physical ageing of the high-voltage battery.

Škoda Enyaq Coupé

SKODA

